


Cabinet Loudspeakers SLM6T
65010036



Material / Colour / Finish	Steel / White Ral 9010
Mounting	Two screws
Terminal	Ceramic terminals
Weight	1,2 kg
Rated / max. power	6 W / 6 W
IP-norm	NA
Max / min ambient temperature	90 °C / -20 °C
Standard version	50 V / 100 V transformer
Effective frequency range	160 – 16000 Hz
SPL 1W / 1m	90 db
Dispersion (-6dB) 1kHz / 4kHz	185° / 105°

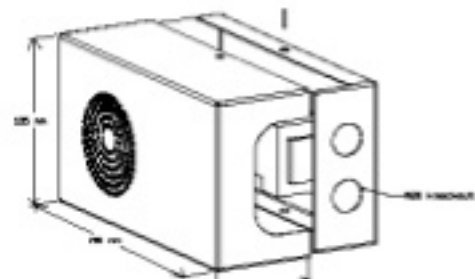

1W/1m 1/3 octave pink noise

50 V / 100 V combined
transformer with temp. fuse


Primary connection:

5 (White) : 6 (Green) 50V

5 (White) : 8 (Red) 100V

Secondary nominal tapings:

1 : 4	6,0 W
1 : 3	3,0 W
2 : 4	2,0 W
1 : 2	1,5 W
3 : 4	0,8 W
2 : 3	0,5 W

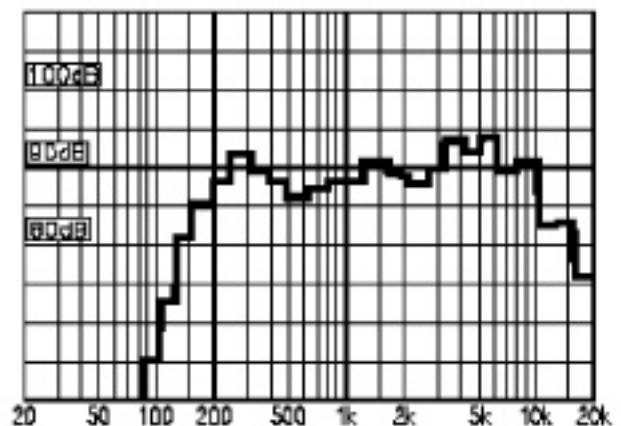

Spector Lumenex have a policy of continuous product improvement therefore this information is subject to change without notice.
© Copyright. This publication is the property of Spector Lumenex & may not be copied or transmitted without the express written permission of Spector Lumenex.