

## Vandal Proof Cabinet Loudspeaker

65010036 – Primary Tapped  
65010164 – Secondary Tapped




### Specification


Material / Colour / Finish	Alu. Alloy (LM6) polyester coated / White / Red
Mounting	4 Internal screws
Terminal	Inside screw terminals
Weight without / with transformer (T)	1.2 / 1.5 Kg
Rated power / max Power	6 Watt / 10 Watt
IP-norm	IP-norm56
Max/ Min ambient temperature	+150/-40 °C
Impedance	on request
Standard Model Transformer	100V / 50V
Effective Frequency Range	220 – 20 kHz
SPL 1W / 1m	87 dBA
Dispersion (-6dB) 1kHz / 4kHz	160 / 90 degrees

Transformer: 100 volt  
Nominal tapings:

1 : 4	6,0 W
1 : 3	3.0 W
1 : 2	1.5 W
2 : 3	0.5 W

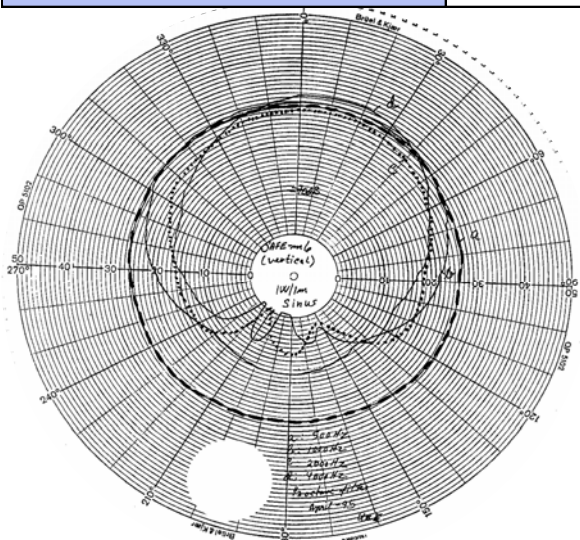

### 1W/ 1m 1/3 Octave pink noise

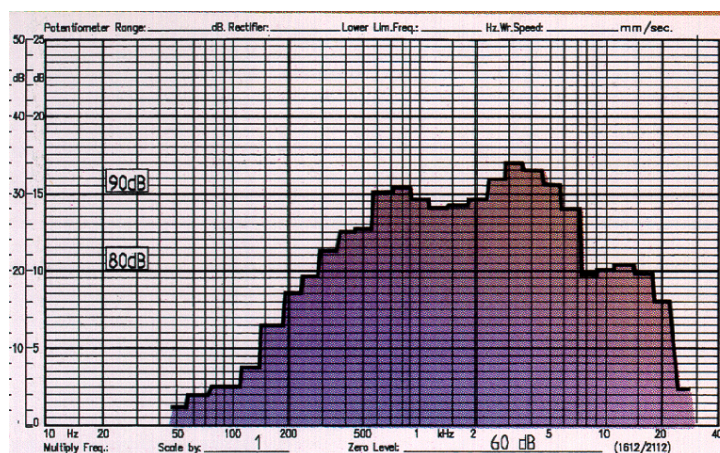


Morley Avenue  
Mapperley  
Nottingham  
NG3 5FW  
England

Tel: +44 (0) 115 955 11 99  
Fax: +44 (0) 115 955 19 19  
E-Mail: [tfis.voice.uk@tycoint.com](mailto:tfis.voice.uk@tycoint.com)  
http: [www.tycofis.co.uk](http://www.tycofis.co.uk)

**tyco**

Fire & Integrated  
Solutions

# Vandal Proof Cabinet Loudspeaker, General Arrangement

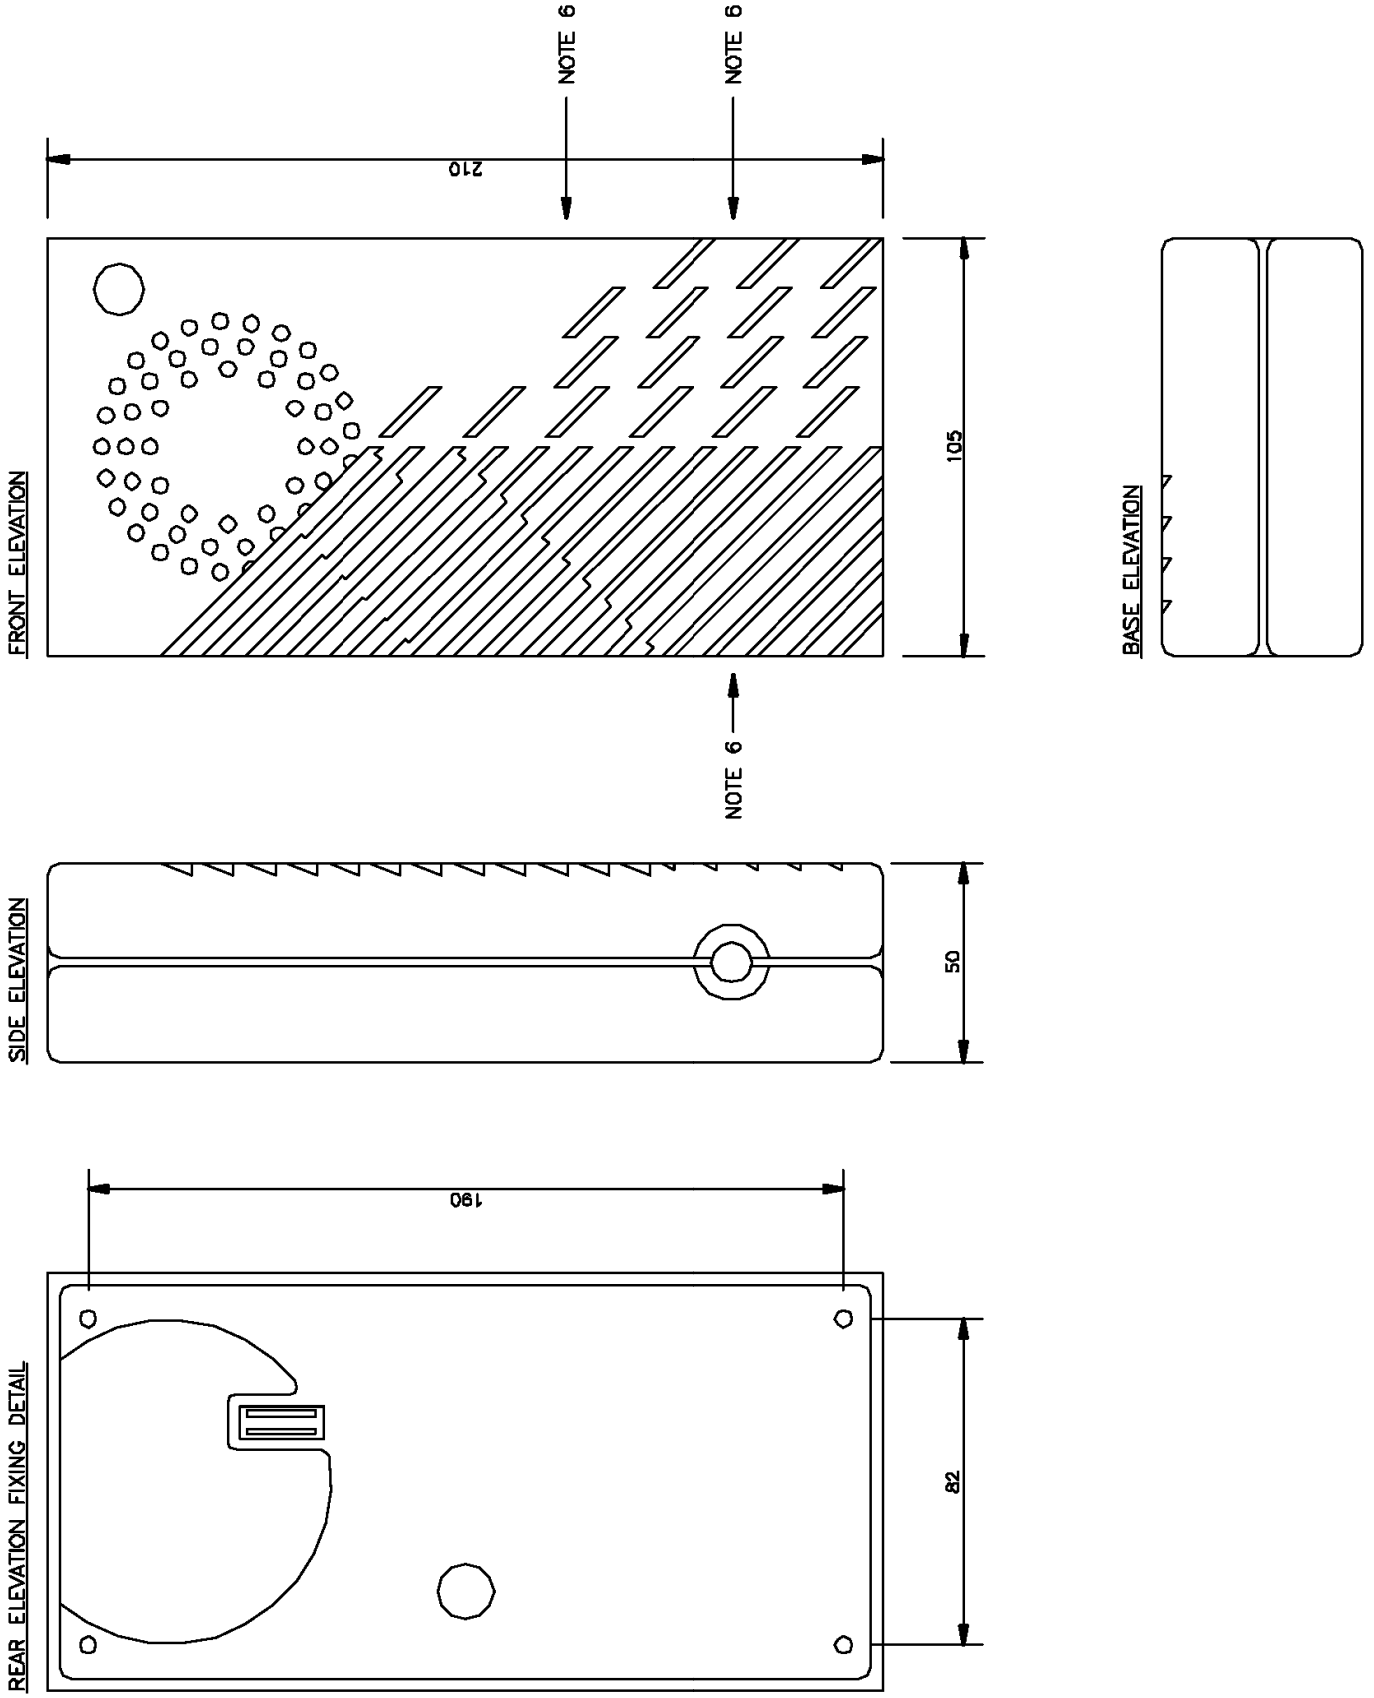

Tyco Fire & Integrated Solutions have a policy of continuous product improvement, therefore this information is subject to change without notice.  
© Copyright. This publication is the property of Tyco Fire & Integrated Solutions. It may not be copied or transmitted without the express written permission of Tyco Fire & Integrated Solutions.