

**Bi-directional Loudspeaker**  
**65010028**




**Specification**

|                                  |                      |
|----------------------------------|----------------------|
| Colour / finish .....            | Anodised or RAL 9010 |
| Material .....                   | Aluminium            |
| Termination .....                | Cable 1m*            |
| Weight .....                     | 2.3 Kg               |
| Rated / Max Power .....          | 6 Watts / 8 Watts    |
| IP Rating .....                  | 0                    |
| Max/min ambient temp .....       | +90°C / -40°C        |
| Effective frequency range .....  | 150 - 9000 Hz        |
| SPL, 1 Watt/1m .....             | 85 db                |
| SPL, Rated power 1 Watt/1m ..... | 93 db                |
| Fixing centres .....             | 157mm                |
| Fixing hole diameter .....       | 5mm                  |
| Dispersion at 1kHz/4kHz .....    | 150°/60°             |


\* Termination is 1 metre flexible non flame retardant non armoured cable tail

70 / 100 Volt Line Transformer (70V line to special order)

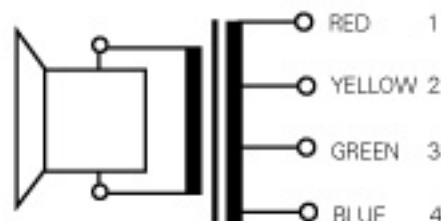

Primary nominal tapings:

|       |       |
|-------|-------|
| 1 : 2 | 6.0 W |
| 2 : 3 | 3.0 W |
| 3 : 4 | 1.5 W |
| 1 : 3 | 1.0 W |
| 2 : 4 | 0.5 W |
| 1 : 4 | 0.3 W |

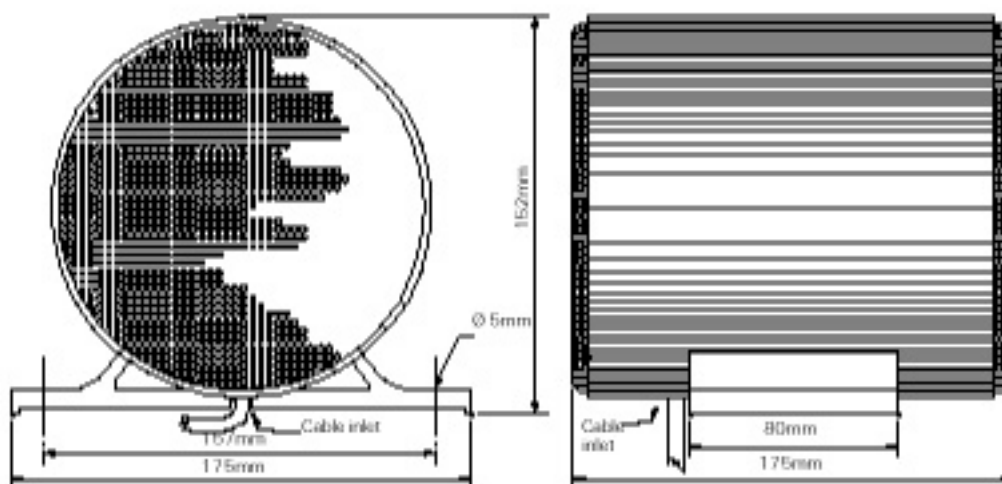

Spector Lumenex have a policy of continuous product improvement therefore this information is subject to change without notice.  
© Copyright. This publication is the property of Spector Lumenex & may not be copied or transmitted without the express written permission of Spector Lumenex.