


**Bi-directional Loudspeaker  
(Nemko Certified 65010027)**



**Specification**


Colour / finish .....	Anodised
Material .....	Aluminium
Termination .....	Cable Ø 25mm
N Weight .....	2.2 Kg
Rated power .....	6 Watts
Max power .....	8 Watts
Dispersion at 1000Hz/4000Hz .....	150/150 degrees
IP Rating .....	D
Max/min ambient temp .....	+150/-40°C
Effective frequency range .....	150 - 20000 Hz
SPL, 1 Watt/1m .....	92 dB
SPL, Rated power 1 Watt/1m .....	99 dBA
Fixing centres .....	157mm
Fixing hole diameter .....	5mm

70 / 100 Volt Line Transformer (70V line to special order)

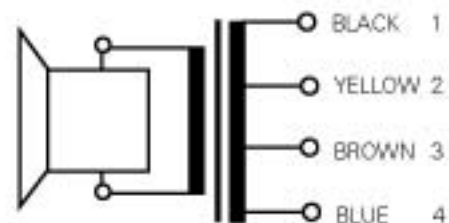

Primary nominal tapings:

1 : 2	6.0 W
2 : 3	3.0 W
2 : 4	1.5 W
1 : 3	1.0 W
2 : 4	0.5 W
1 : 4	0.3 W

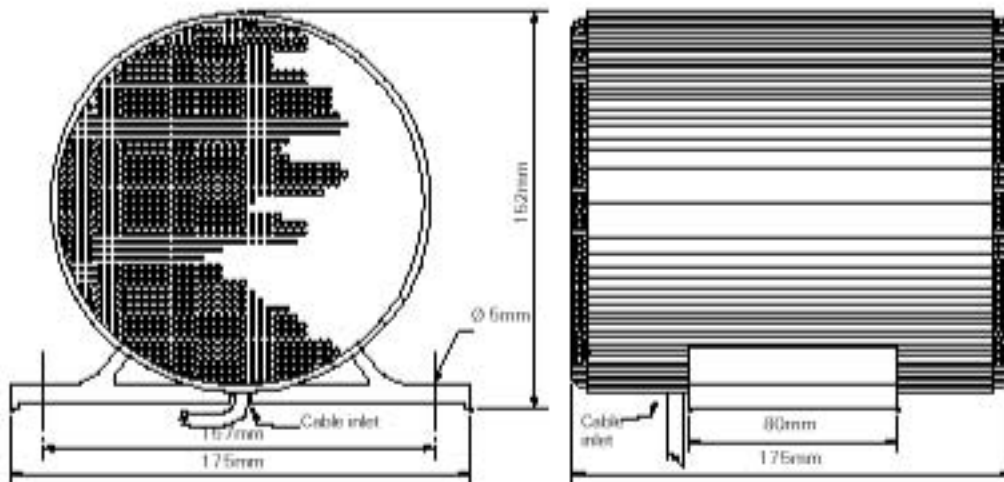

Nemko certified to withstand 150°C for 24 hours and flames for 30 minutes (700°C)

*Spector Lumenex have a policy of continuous product improvement therefore this information is subject to change without notice.  
© Copyright. This publication is the property of Spector Lumenex & may not be copied or transmitted without the express written permission of Spector Lumenex.*